


FKP POLYMERTECHNIK GmbH

A-1080 Wien, Schlösselgasse 22 tel +43 (0)1405 16 07 mail office@polymertechnik.at

Your Company			
Type	<input type="radio"/> User <input type="radio"/> OEM / Eng. <input type="radio"/> Agent <input type="radio"/> Consultant		
Contact Person			
Phone		Email	
Fax		Date	

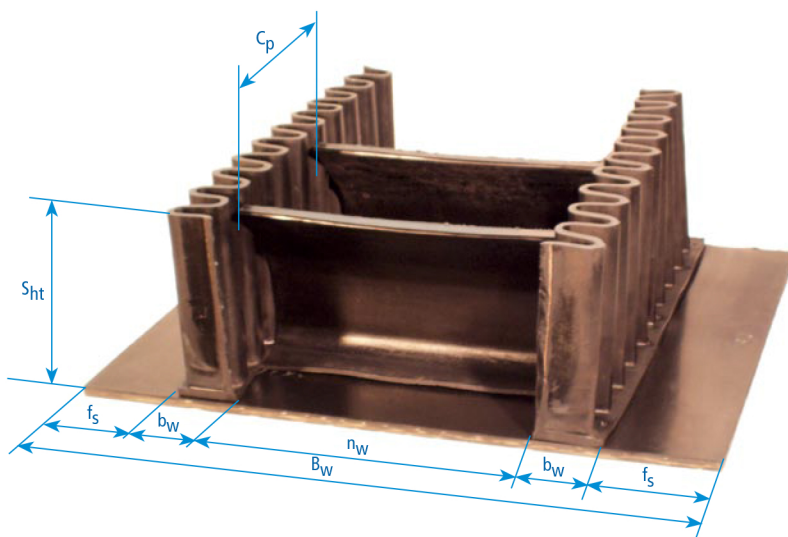

Type „T“




Type „C“



Type „TC“



Type „TC-XS“

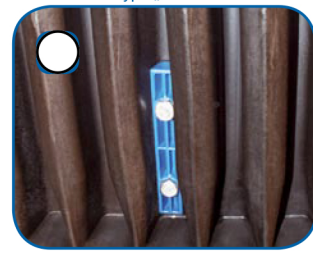

Screw reinforcement

Belt width	B _W	mm
Base belt tensile strength		N/mm
Base belt quality		<input type="checkbox"/> high abrasion resistant <input type="checkbox"/> heat resistant up to 100°C <input type="checkbox"/> oil and fat <input type="checkbox"/> flame retardant
Free lateral space	f _s	mm
Net belt width	n _W	mm
Sidewall height	S _{ht}	mm
Sidewall width	b _W	mm
Cleat type		please, select cleat type in the right column
Cleat height	C _h	mm
Cleat pitch	C _p	mm
Length endless or open		m

Splice: We assume endless, if not specified differently ☐ open

send mail to office@polymertechnik.at